



CTC Anchor with Steel Nail

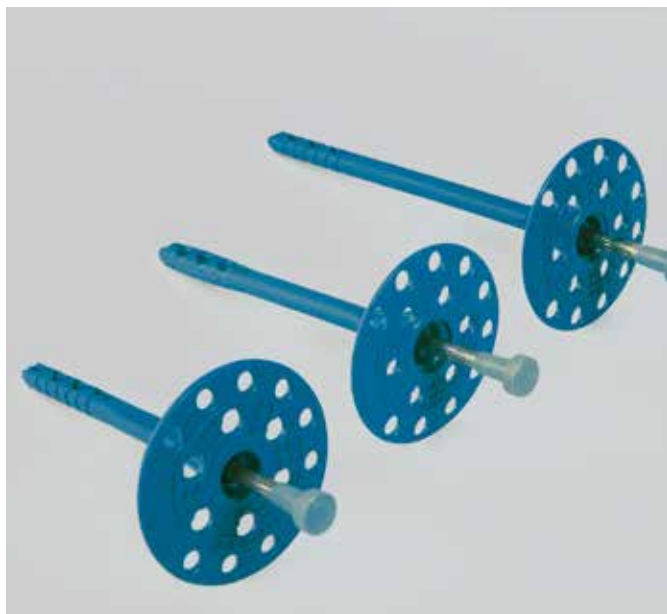

- Used for mechanical fixing of thermal insulation boards to concrete, bricks and honeycomb blocks.
- Pre-mounted nail ensures quick and easy installation. Especially recommended in ROCKWOOL applications.

TECHNICAL DATA

Anchorage Depth $h_v \geq$	25-35 mm
Drill Hole Depth t	35-45 mm
Anchor Diameter	8 mm
Hammer-in Mounting	
Plate Diameter	60 mm
With CTD140	140 mm
With CTD110	110 mm
With CTD90	90 mm
Tensile Strength	0,20 kN

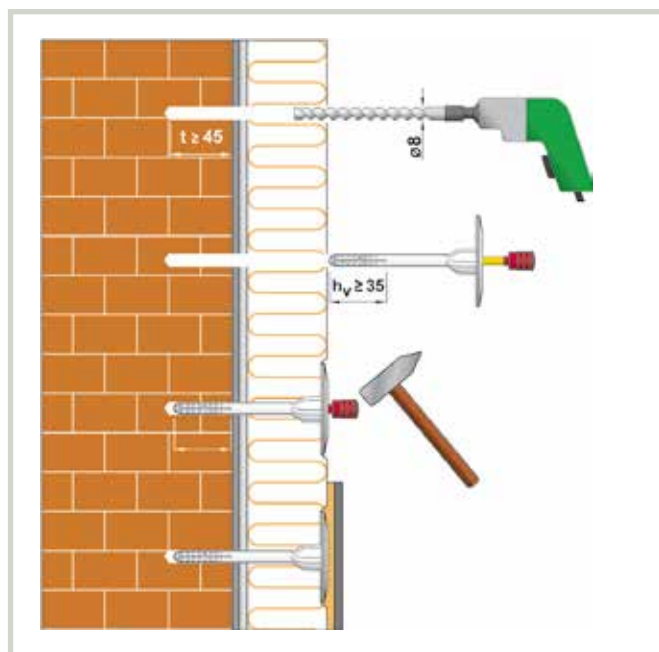

PRODUCT RANGE	Insulation Thickness (mm)		Nominal length (mm)	Product Name	Product Code	Packing unit (pieces)
	Old building*	New building				
	40	60	95	CTC95-95 mm	C95202095	500
	60	80	115	CTC115-115 mm	C95202115	500
	80	100	135	CTC135-1355 mm	C95202135	500
	100	120	155	CTC155-155 mm	C95202155	500
	120	140	180	CTC180-180 mm	C95202180	500
	140	160	200	CTC200-200 mm	C95202200	500

* 20 mm old render